



Nelweld[®] N1500i[™]

Third generation inverter technology propels stud welding into the 21st century

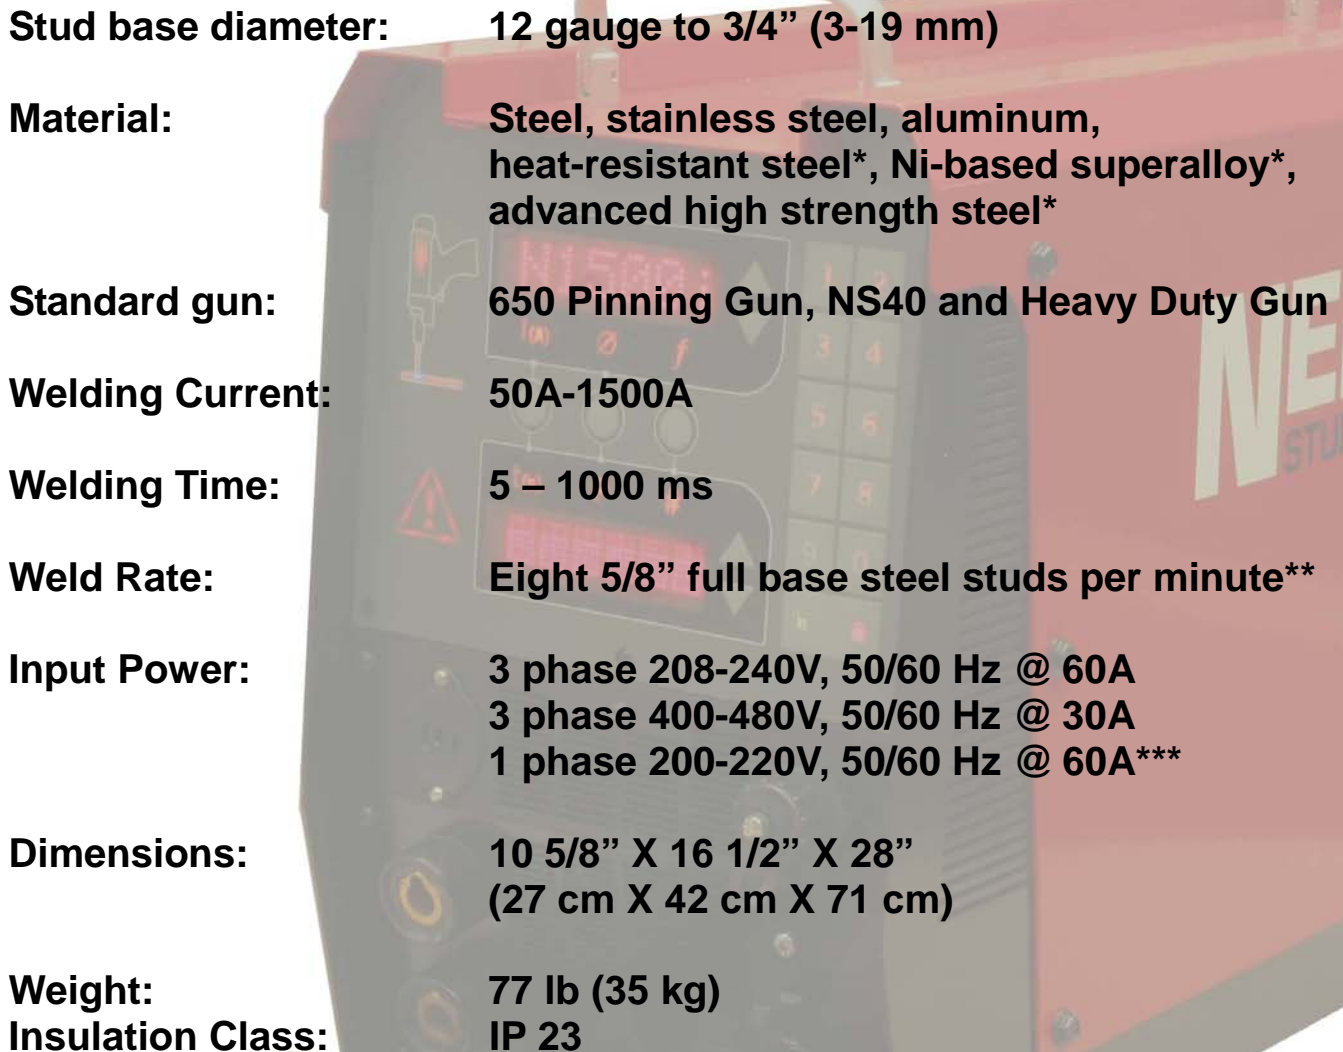
This new, dependable, and light-weight stud welder is not light in power. From the inventor and trusted leader of stud welding, N1500i is a third generation inverter that Nelson has to offer to the world hungry for such a little giant. This all-digital system has 50% more output power than comparable products in the market. This means it can weld larger studs, weld more studs per minute and drive more cable (up to 100-600 feet*). The friendly user interface with 10 presets, graphic gun and welder status, and bright alpha-numeric displays reduces set-up time, and operator training and error. It sports:

- **Parallel Silicon[™]** IGBT arc power
- **DSP Plus[™]** brain power
- **Dual Loop[™]** fast reaction arc dynamics
- **Turbo Planar[™]** high efficiency transformer
- **Stud Expert[™]** database programming of welding parameters based on application conditions
- **Touch Safe[™]** operator protection
- **Nonstick Lift[™]** adaptive pilot arc ignition
- **Synchro Plunge[™]** choreographed current decay and stud advance
- **Wireless Nelware[™]** self diagnostics, production monitor and quality monitor software

Precision control at 60,000 Hz frequency ensures the most stable arc, accurate heat input and highest quality process. Consistent welds are produced, inconsistent plate surface, weld position, gun and cable conditions notwithstanding. Combining control, gas and power in one composite cable provides robustness, reliability and increased up-time in production.

Applications

- Shipbuilding, industrial, automotive repair and production, and construction
- Concrete anchors, insulation pins, threaded studs, refractory anchors, pins
- Auto-feed hand gun applications, such as W-top, fir tree, threaded studs and T-studs

Technical Data

The image shows a red and black Nelson Stud Welder N1500i. It has a control panel with a digital display and several buttons. A welding torch is attached to the front. The unit is compact and portable.

Stud base diameter:	12 gauge to 3/4" (3-19 mm)
Material:	Steel, stainless steel, aluminum, heat-resistant steel*, Ni-based superalloy*, advanced high strength steel*
Standard gun:	650 Pinning Gun, NS40 and Heavy Duty Gun
Welding Current:	50A-1500A
Welding Time:	5 – 1000 ms
Weld Rate:	Eight 5/8" full base steel studs per minute**
Input Power:	3 phase 208-240V, 50/60 Hz @ 60A 3 phase 400-480V, 50/60 Hz @ 30A 1 phase 200-220V, 50/60 Hz @ 60A***
Dimensions:	10 5/8" X 16 1/2" X 28" (27 cm X 42 cm X 71 cm)
Weight:	77 lb (35 kg)
Insulation Class:	IP 23

Welding Processes

- Drawn Arc
- Gas Arc
- Short-Cycle
- Super-Short-Cycle™****

* Contact Nelson for suitability and maximum stud diameter of using your specific material.
** Using 1200 A, 670 ms settings and 3 phase input supply.
*** Output is limited to 800A in single phase.
**** Developed for advanced high strength steels.

USA

7900 West Ridge Road
Elyria, OH 44036-2019
Telephone: 800.635.9353
Fax: 440.329.0526
www.NelsonStudWelding.com

Germany

Phone: 49.2332.661.0

France

Phone: 33.1.34.11.94.00

Italy

Phone: 39.11.6059230

China

Phone: 86.22.26371514

Canada & Mexico

Phone: 800.635.9353

Great Britain

Phone: 44.1296.433500